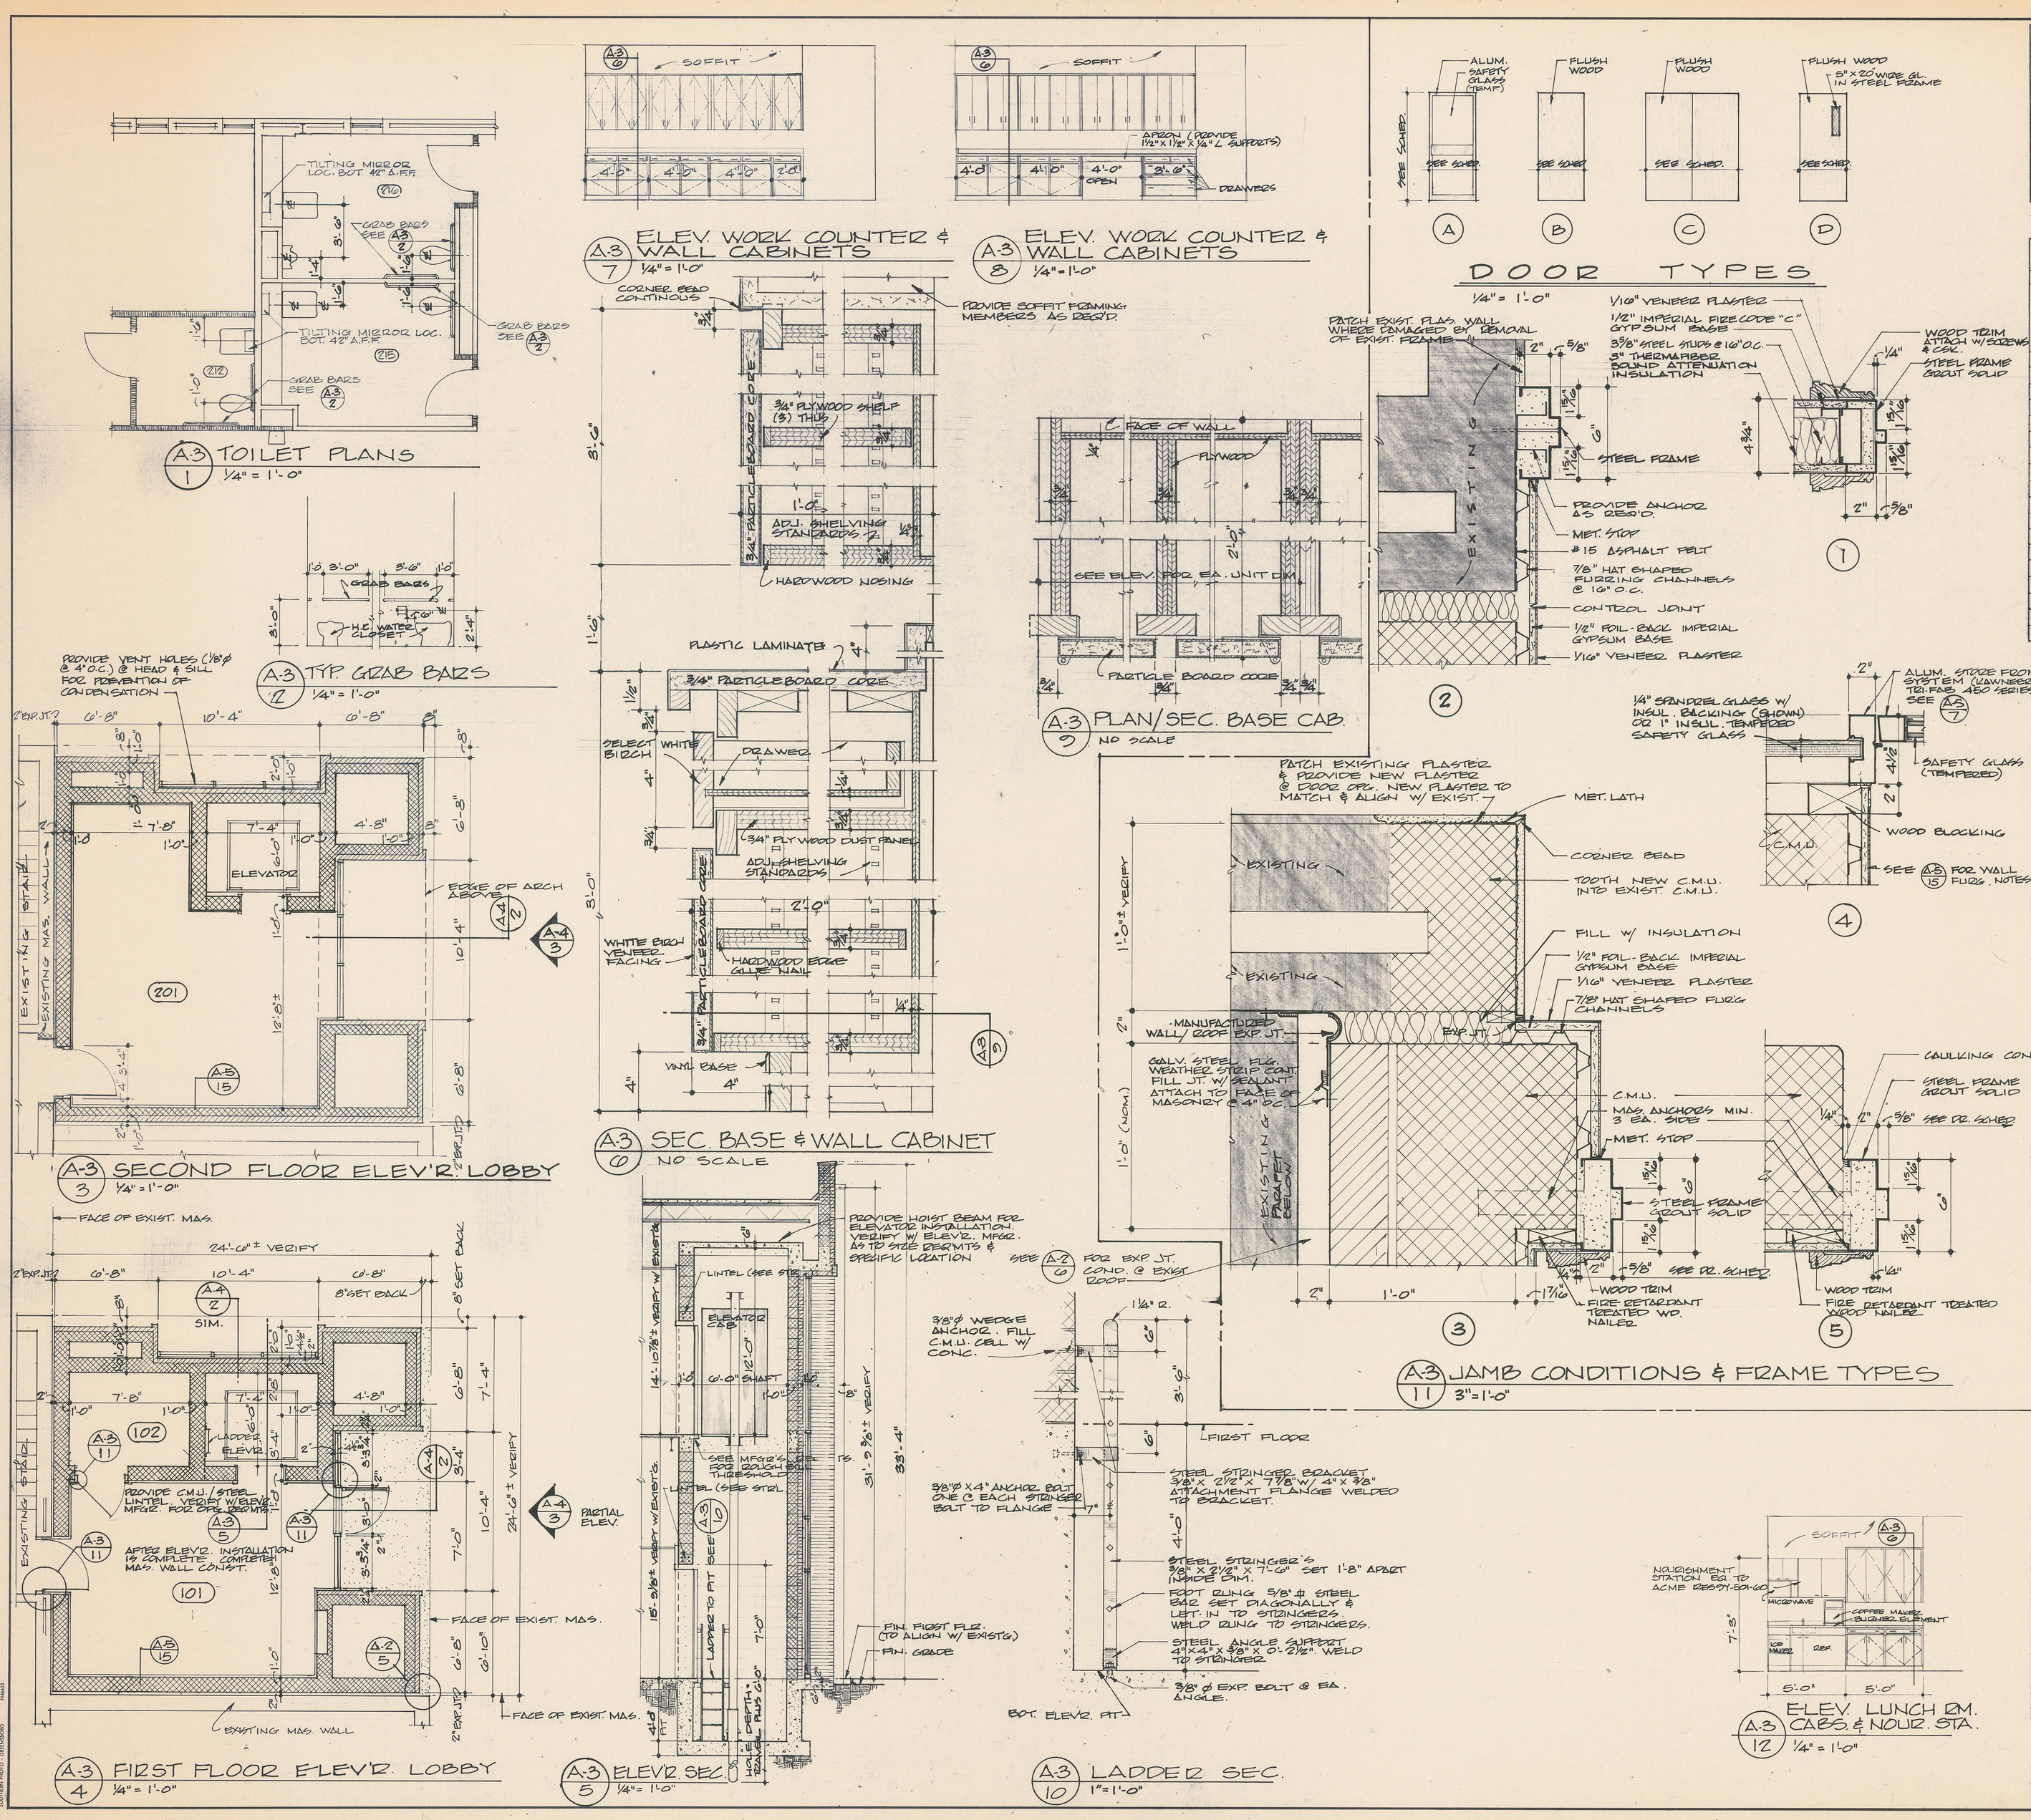

DOOR SCHEDULE

DOOR Nº	DOOR TYPE	WIDTH	HEIGHT	THICK	FRAME TYPE	JAMB	LABEL
101	A	3'-0"	7'-0"	1¾"	4	4	
102	B	3'-0"	7'-0"	1¾"	5	5	B
103	B	3'-0"	7'-0"	1¾"	2	2	B

DOOR SCHEDULE

DOOR Nº	DOOR TYPE	WIDTH	HEIGHT	THICK	FRAME TYPE	JAMB	LABEL
201	B	3'-0"	7'-0"	1¾"	3	3	B
202	B	3'-0"	7'-0"	1¾"	1	1	
203	B	3'-0"	7'-0"	1¾"	1	1	
204	B	3'-0"	7'-0"	1¾"	1	1	
205	B	3'-0"	7'-0"	1¾"	1	1	
206	C	2-3'-0"	7'-0"	1¾"	1	1	B
207	C	2-3'-0"	7'-0"	1¾"	1	1	B
208	D	4'-0"	7'-0"	1¾"	1	1	
209	B	4'-0"	7'-0"	1¾"	1	1	B
210	B	3'-0"	7'-0"	1¾"	1	1	
211	B	3'-0"	7'-0"	1¾"	1	1	
212	B	3'-0"	7'-0"	1¾"	1	1	
213	B	3'-0"	7'-0"	1¾"	1	1	B
214	B	3'-0"	7'-0"	1¾"	1	1	B
215	EXISTG. OPG.	3'-6"	7'-0"		1	1	

(SEE DWG. P1 FOR GENERAL NOTES)

FINISH SCHEDULE

SPACE	FLOOR	BASE	WALLS	CEILING	CEILING HEIGHT	NOTES
101	C	E	G	B	10'-1"	
102	T		M	P	8'-0"	4,
201	C	E	G	B	10'-8"	
202	C	E	K	S	10'-0"	
203	C	E	G&H	N	8'-0"	
204	C	E	G&H	N	8'-0"	
205	C	E	G&H	N	8'-0"	
206	A	D	G&H	H	EXIST'G	1, 3,
207	A	D	G&H	N	8'-0"	1,
208	A	D	H	P	8'-0"	1, 4,
209	A	D	G&H	N	8'-0"	1,
210	A	E	G&H	N	10'-0"	
211	A	D	G&H	N	10'-0"	1,
212	B	D	G	N	8'-0"	1,
213	A	D	L&Q	N	10'-0"	
214	C	E	G&H	N	8'-0"	
215	Q	F	F,L,Q	Q	EXIST'G	3,
216	Q	F	F,L,Q	Q	EXIST'G	3,
S-1	A	D	H	H	EXIST'G	
S-2	A	D	H	H	EXIST'G	

FINISH LEGEND

A	RESILENT TILE
B	SHEET VINYL
C	CARPET
D	RUBBER
E	WOOD
F	CERAMIC (MATCH EXISTING)
G	PAINTED VENEER PLASTER
H	PAINTED EXISTING PLASTER
J	PAINTED MASONRY
K	PAINTED VENEER PLASTER ABOVE CHAIR RAIL & VINYL WALL COVERING BELOW CHAIR RAIL
L	EPOXY PAINTED VENEER PLASTER
M	EPOXY PAINTED MASONRY
N	SUSPENDED ACOUSTICAL TILE
P	PAINTED GYPSUM BOARD
Q	EPOXY PAINTED EXISTING PLASTER
R	EXISTING CERAMIC TILE
S	WOOD FACED TEGULAR 2'x2' CLG. TILE
T	CONCRETE W/ SEALER

FINISH NOTES

1. BASE SHALL HAVE COVE @ AREAS RECEIVING CARPET & TOELESS @ OTHER FINISHES. ALL INSIDE & OUTSIDE CORNERS SHALL BE FURNISHED & INSTALLED. RUBBER BASE EQ. TO "MERLEX VYNITE/RUBBER BASE.
2. CLG. HT. @ SECOND FL. PLATFORM
3. REPAIR EXIST'G. PLAS. CLG. FINISH TO MATCH & ALIGN W/ EXIST'G. PROVIDE NEW FURR CLG. & SUSP. SYSTEM WHERE NONE EXISTS.
4. PROVIDE GYP. BD. SUSP. SYSTEM (HANGERS 1½" @ 4'0" & FURRING @ 16" O.C.

These construction documents are for use in connection with this project only and are not intended or represented to be suitable for reuse on additions to this project, or on any other project. They may be used only with agreement in writing of, and appropriate compensation to, the Architect/Engineer. Any reuse without written agreement will be at the user's sole risk and without liability or legal exposure to the Architect/Engineer; the user shall indemnify and hold harmless the Architect/Engineer from all claims, damages, losses and expenses arising out of or resulting therefrom.

CLARK • NEXSEN • OWEN • BARBIERI • GIBSON
Architects • Engineers
A PROFESSIONAL CORPORATION
ALLIED ARTS BLDG., BOX 1156 • LYNCHBURG, VA. 24505 • 804/847-9081
740 DUKE STREET / SUITE 200 • NORFOLK, VA. 23510 • 804/622-2800

RELOCATION OF THE
JONES MEMORIAL LIBRARY
MEMORIAL AVE. & LAKESIDE DR.
LYNCHBURG, VIRGINIA

TOILET PLANS FIN. & DR. SCHED ELEV'R PLAN & DETS.

revision

design by J.D.O.
drawn by A.F.W.
checked J.D.O.
date SEPT. 86
comm 2071

scale NOTED

drawing A-3